


Optical PLC Splitter

PLC-104-SC/APC-S splitter

- Ø0.9mm input loose tube pigtail without connector
- Ø0.9mm output loose tube pigtail without connector
- Adopts G.657A optical fiber
- Micro encapsulation
- Provides split ratio 1x4

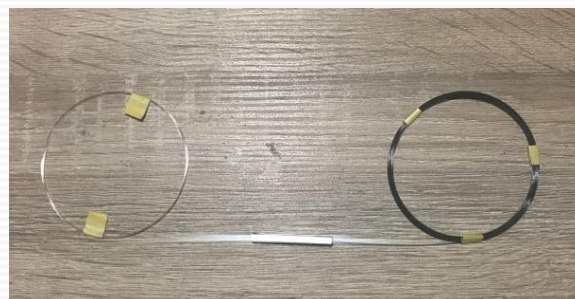

Optical properties

Parameter	Specification
Operating Wavelength	1260 ~ 1650 nm
Maximum input power	>300mW
Directivity	>55dB
WDL	<0.5dB
PDL	<0.3dB
Uniformity	<0.8dB
Insertion Loss	≤7.0dB
Return Loss	> 60dB

Temperature and humidity

Parameter	Specification
Operation temp	−40 to +85°C
Transport and storage	−40 to +85°C
Storage rel. humidity	20~95 (%RH)